


NOTES

- 1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
- 2. Color:
 - Background - Brown
 - Message - White - Type H Reflective
- 3. Message Series - D
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. D7-77L is same as D7-77R except the arrow is reversed.
- 6. Substitute appropriate name and adjust spacing as required to achieve proper balance. When necessary to accomodate name, lengthen board by 6" (150 mm) increments. Minimum sign length is 48" (1200 mm).
- 7. Use 15" (375 mm) arrow for sign lengths up to 54" (1350 mm). Use 21" (525 mm) arrow for sign lengths of 60" (150 mm) to 72" (1800 mm).

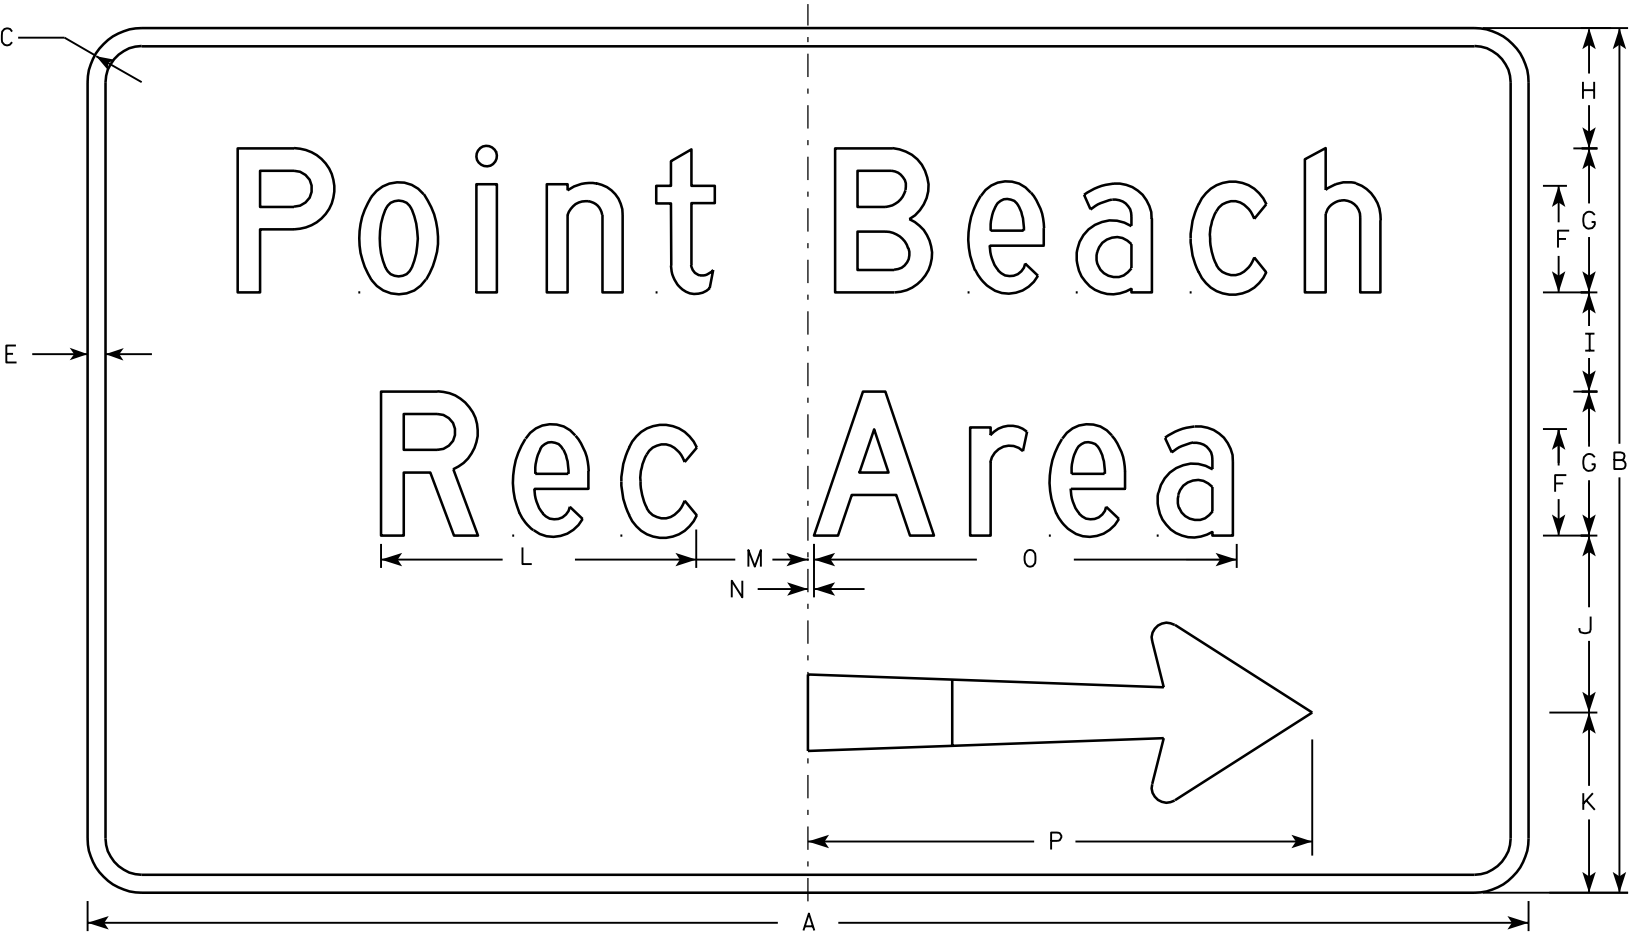


D7-77R

Metric equivalent
for this sign is:

SIZE	
1	
2	Varies X 900 mm
3	
4	
5	

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
2	Varies	36	2 1/4		3/4	4 1/2	6	5	4 1/8	7 3/8	7 1/2	13 1/8	4 5/8	3/8	17 1/2	21	15	3 1/8	6 1/8	2 1/8	5/8	1/8	2 3/4	3 1/4			Varies
3																											
4																											
5																											

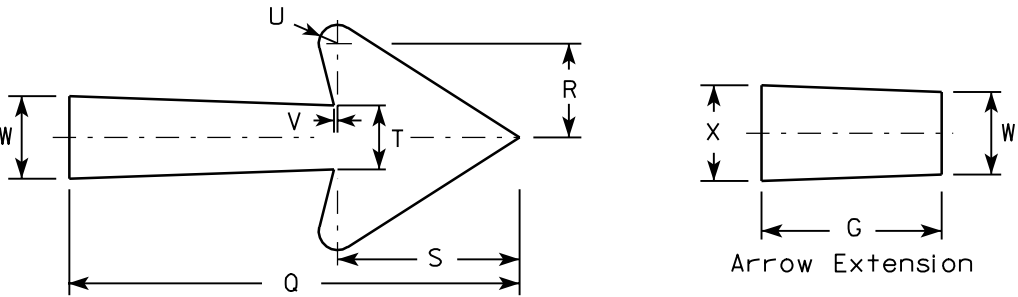

Arrow Detail

STANDARD SIGN
D7-77

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Chester J. Spang
for State Traffic Engineer

DATE 1/24/02

PLATE NO. D7-77.5

PROJECT NO:

SHEET NO:

E